


Dimension

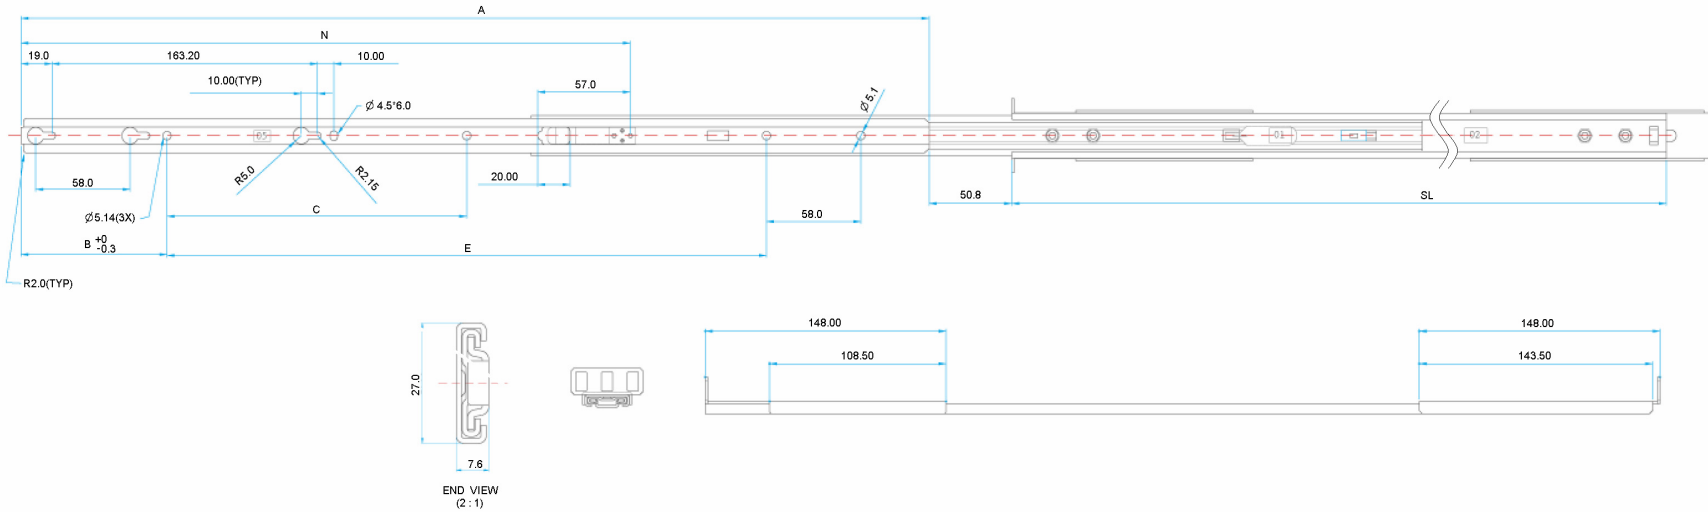

(Unit:mm)

SIZE	SL	A	B	C	E	N
16"	407.00	406.00	89.66			262.45
18"	457.00	456.00	89.66			312.45
20"	508.00	507.00	89.66	184.20	368.40	348.45
22"	559.00	558.00	89.66	184.20	368.40	374.45
24"	610.00	609.00	89.66	184.20	368.40	400.45
26"	660.00	659.00	57.91	184.20		425.45
28"	711.00	710.00	57.91	184.20		434.45
30"	762.00	761.00	57.91	184.20		477.45

Mounting : side mount

Side Clearance : 9.11 mm (including brackets), Maximum chassis width can be 434 with bracket being mounted behind the rail

Height : 27 mm

Loading : 75# class for 300 cycles in 26" long

Size : 16" through 30" in 2" increment.

Feature : extremely thin profile to fit the maximum chassis width 434 mm.

lock open design, key holes for shoulder rivet, 52 mm overtravel

Finish: ROHS compliant zinc plated

Packing : retailing pack (1 pair of slides with bracket re-attached, installation guide, screw kit included)

Option : Tool-less brackets