


Dimension

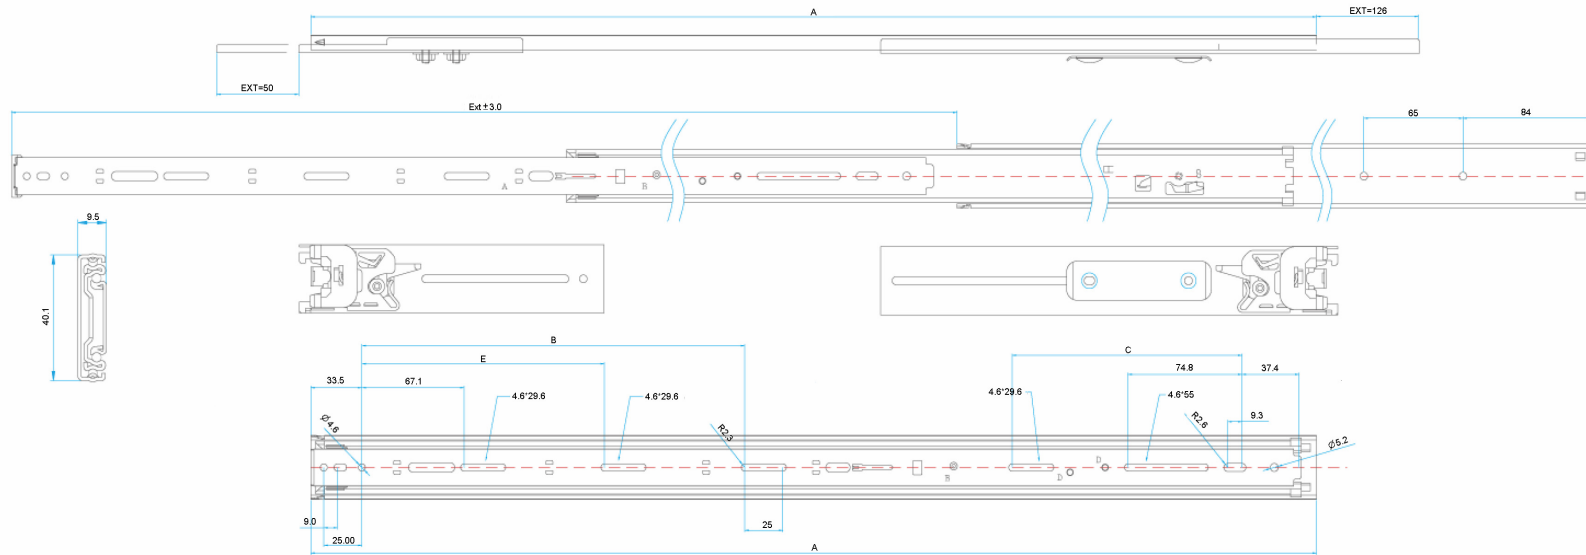

(Unit:mm)

SIZE	EXT	A	B	C	E	F
20"	536.0	510.0				178.00
22"	587.0	560.0			159.2	178.00
24"	636.0	610.0			159.2	201.81
26"	687.0	660.0	251.3	150.8	159.2	226.62
28"	736.0	710.0	251.3	167.1	159.2	176.62

Mounting : side mount

Side Clearance : 9.5 mm (including brackets), Maximum chassis width can be 430 mm or under.

Height : 43.6 mm (within 1 U)

Loading : 100 pound class for 1000 cycles in 26" (static load can be 150# for 48 hour)

Size : 20" through 28" in 2" increment

Feature : behind the rail tool-less bracket design to allow slides to be used in 1U or 2 U chassis. patented front activating lock open/quick release latch, ball retainer stay open device, super low deflection

Finish : ROHS compliant zinc plated

Packing : retailing pack (1 pair of slides with bracket re-attached, installation guide, screw kit included)

Option : CMA(cable management arm)