


Dimension

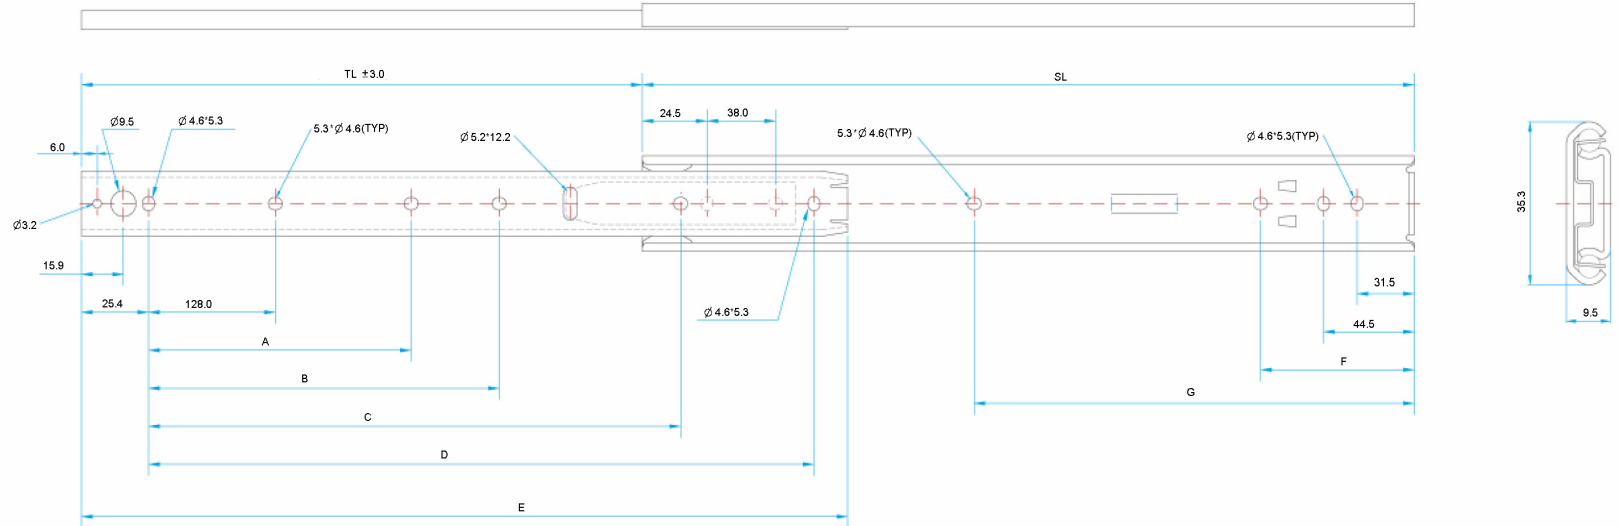

(Unit:mm)

SIZE	SL	TL	A	B	C	D	E	F	G
16"	302.05	199.0			212.3		299.45		
18"	352.85	246.5			263.1		350.25		244.6
20"	382.25	275.0			288.5		375.65		244.6
22"	403.65	300.5			313.9		401.05		244.6
24"	454.45	330.5	256.0		343.2	401.3	452.85	155.7	320.8
26"	505.25	381.0	256.0		394.4	452.1	502.65	155.7	320.8
28"	556.05	406.0	256.0		419.8	502.9	553.45	155.7	320.8
30"	606.85	431.0	256.0	352.0	445.2	553.7	604.25	155.7	244.6

- Mounting : Side mount.
- Side Clearance : 3/8" plus 1/64", minus 0 each side.
- Height : 1-25/64" (35.3 mm)
- Loading : 50 pound class.
- Size : 12", 14", 15", 16", 18", 20", 22", 24", 26"
- Feature : Low profile for shallow drawers, shelves or trays. Metal latch de-
tent in/lock function in extended position for easy drawer removal
and industrial cabinet applications.
- Finish: Zinc plated / black plated.
- Packing : 25 pairs individually poly-packaged, no screws.
- Option : NJ23002-Metal latch positive stop.
NJ21001-Plastic lever for positive stop.